


**Web** [Images](#) [Video](#) [Maps](#) [News](#) [Shopping](#) [Gmail](#) [more](#) ▼

[Sign in](#)

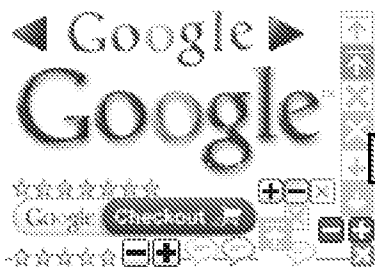

returning id of data type to identify data type

Search

[Advanced Search](#)  
[Preferences](#)

**Web** [Show options...](#) Results **61 - 70** of about **17,000,000** for **returning id of data type to identify data type**. (0.13 seconds)

1. [DATEVALUE function returning "Data Type Mismatch" only when ...](#)

Jan 14, 2009 ... If I sort, I get the error "**Data Type Mismatch**." As long as I don't sort, I don't get an error. How do I modify this formula to **return** a ...

[www.experts-exchange.com/Programming/Languages/SQL\\_Syntax/Q\\_24052984.html](http://www.experts-exchange.com/Programming/Languages/SQL_Syntax/Q_24052984.html)  
- 53k - [Cached](#) - [Similar pages](#)

2. [BEGIN LICENSE BLOCK \\*\\*\\*\\*\\* \\* Version: MPL 1.1/GPL 2.0/LGPL 2.1 ...](#)

toArray(new **Datatype**[0])); **return** ds; } /\*\* \* Gets a set of datatypes that is superclasses, in this set, to a given datatypes \* @param **id** identifies the ...  
[fisheye1.atlassian.com/browse/~raw,r=1.8/scam/scamController/src/se/kmr/scam/client/datatype/impl/DatatypeSetImpl.java](http://fisheye1.atlassian.com/browse/~raw,r=1.8/scam/scamController/src/se/kmr/scam/client/datatype/impl/DatatypeSetImpl.java) - 15k - [Cached](#) - [Similar pages](#)

3. [Original data types in Active Record query result? | CodeIgniter ...](#)

7 posts - 2 authors - Last post: Apr 2  
but it also returns my **ID** columns as **type** string, so no joy there. ... I think, be covered by the new **data type** of INT64 (?) in PHP6). ... @**return** array Returns modified active record array with cast properties ...  
[codeigniter.com/forums/viewthread/110393/](http://codeigniter.com/forums/viewthread/110393/) - 55k - [Cached](#) - [Similar pages](#)

4. [\[#ZF-1750\] Make Db adapters return consistent datatype from ...](#)

Most adapters **return** a string, even though you might expect the value of an auto-generated value would be an integer. The **datatype** is string because the ...  
[framework.zend.com/issues/browse/ZF-1750](http://framework.zend.com/issues/browse/ZF-1750) - 38k - [Cached](#) - [Similar pages](#)

5. [REAL Software Forums • View topic - Empty Value of TEXT-Datatype ...](#)

7 posts - 2 authors - Last post: Jan 21  
... **return** empty values in the RecordSet (for Fields with **Data Type** 'TEXT'), .... I don't get the content of the TEXT-Field here: SELECT **id**, ...  
[forums.realsoftware.com/viewtopic.php?f=3&t=24927](http://forums.realsoftware.com/viewtopic.php?f=3&t=24927) - 23k - [Cached](#) - [Similar pages](#)

6. [Oracle: PL/SQL Function returning objects, scalar data types, sql ...](#)

Is it possible for a PL/SQL function to **return** a user-defined **data type** (i.e. ...  
**REFSEQNO%TYPE)** **return** TNode as TNode node; begin node.**id** := aRefSeqNo; ...  
[en.allexperts.com/q/Oracle-1451/PL-SQL-Function-returning.htm](http://en.allexperts.com/q/Oracle-1451/PL-SQL-Function-returning.htm) - 18k

- [Cached](#) - [Similar pages](#)

7. [\[PDF\] Re: How to \*\*return\*\* a user-defined \*\*data type\*\* object from a webservice?](#)

File Format: PDF/Adobe Acrobat - [View as HTML](#)

"Id"). { foreach (PropertyInfo toField in. toRecord.GetType().GetProperties()) ... to specify a particular **data type** from a particular platform. ...

[www.tech-archive.net/pdf/Archive/DotNet/microsoft.public.dotnet.framework.webservices/2008-03/msg00018.pdf](http://www.tech-archive.net/pdf/Archive/DotNet/microsoft.public.dotnet.framework.webservices/2008-03/msg00018.pdf) - [Similar pages](#)

8. [Erlang \*\*data types\*\* \(Lesson 2\) » article » Federico Feroldi's blog](#)

So, let's take a brief look on Erlang's **data types** in this article. ... pass funs to as parameter to function calls and **return** funs as function results: ... **ID**, post\_title, post\_name, post\_status, post\_date, CAST(meta\_value AS UNSIGNED) ...

[www.pixzone.com/blog/220/erlang-data-types-lesson-2/](http://www.pixzone.com/blog/220/erlang-data-types-lesson-2/) - 21k - [Cached](#) - [Similar pages](#)

9. [Development/Tutorials/Akonadi/SerializerPlugin - KDE TechBase](#)

To use your own **data type** with KDE's API for Akonadi, you will need three things: ...

```
<history> <header> <local id="contactId1" /> <remote id="contactId2" /> </header> ....  
Item::FullPayload ) return false; History history; if ( ! ...
```

[techbase.kde.org/Development/Tutorials/Akonadi/SerializerPlugin](http://techbase.kde.org/Development/Tutorials/Akonadi/SerializerPlugin) - 82k

- [Cached](#) - [Similar pages](#)

10. [Design Patterns as Higher-Order \*\*Datatype\*\*-Generic Programs ...](#)

The necessary features are higher-order and **datatype**-generic constructs; ...

implement subroutines by pushing arguments and **return** address onto the stack. ....

```
b=a} def fold[fb](f :s{type a=Fix.this.a; type b=fb}=>fb) : fb = f(bimap(id, ...
```

[lambda-lhe-ultimate.org/node/1360](http://lambda-lhe-ultimate.org/node/1360) - 37k - [Cached](#) - [Similar pages](#)

Tip: These results **do not include** the word "identify". [Show results that include "identify"](#).



returning id of data type to identify data type

Search

[Search within results](#) - [Language Tools](#) - [Search Help](#) - [Dissatisfied? Help us improve](#) - [Try Google Experimental](#)

[Google Home](#) - [Advertising Programs](#) - [Business Solutions](#) - [Privacy](#) - [About Google](#)